NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 5HST16 @1465 R.P.M

5HST16/X/XXXXX

PUMPSENSE

HST RANGE

MODEL 5HST16	WORKING PRESS.	16 bar
SIZE 150x125-423	TEST PRESS.	24 bar

TYPE-AXIALLY SPLIT CASE TWO STAGE

SPEED 1465 rpm

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	423mm
Min. Impeller Dia.	260mm
Impeller Drg. No.	xxxxx
Volute Drg. No.	xxxxx
Hydraulic Data	
Eye Area 339cm²	Throat Area 36cm²
Impeller Width 30mm	No. of Vanes 6
Volute Construction – Single Volute	
Shaft Gr. : 3S	

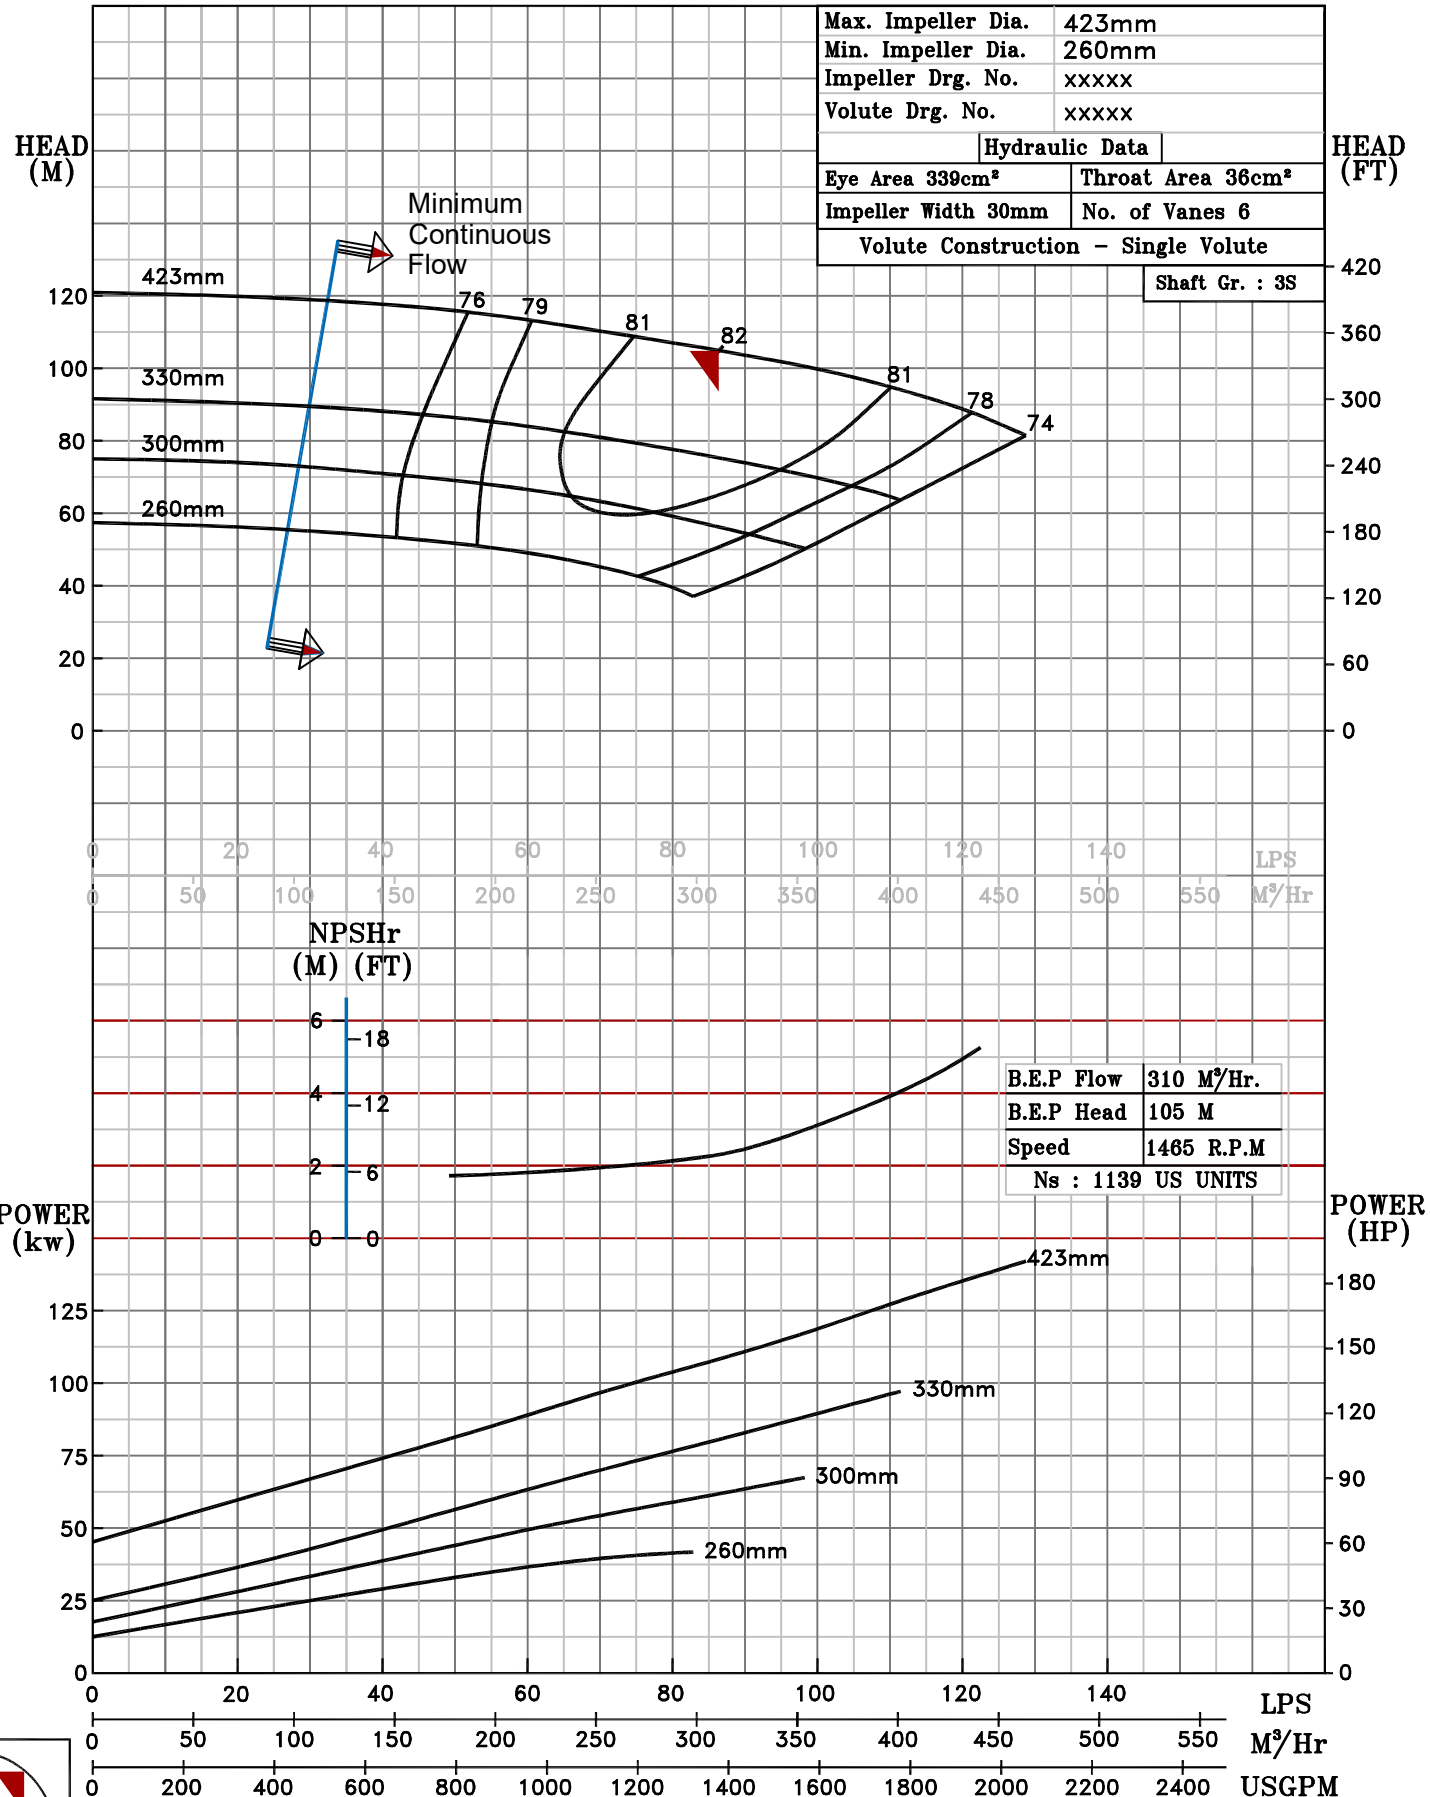

B.E.P

1465 RPM