NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 6HFTD12L @1480 R.P.M

6HFTD12L/Y/901352

PUMPSENSE

HFT RANGE

MODEL 6HFTD12L	WORKING PRESS.	30 bar
SIZE 200x150–314	TEST PRESS.	45 bar
TYPE–AXIALLY SPLIT CASE TWO STAGE		
SPEED 1480 rpm		

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	314mm
Min. Impeller Dia.	260mm
Impeller Drg. No.	6HFTD12L/HD003/0
Volute drg. No.	6HFTD12L/HD001/0
Hydraulic Data	
Eye Area 221.2cm²	Throat Area 67.33cm²
Impeller width 34mm	No. of Vanes 6
Volute Construction –Two Single Volute	
Shaft Gr: – 3F	

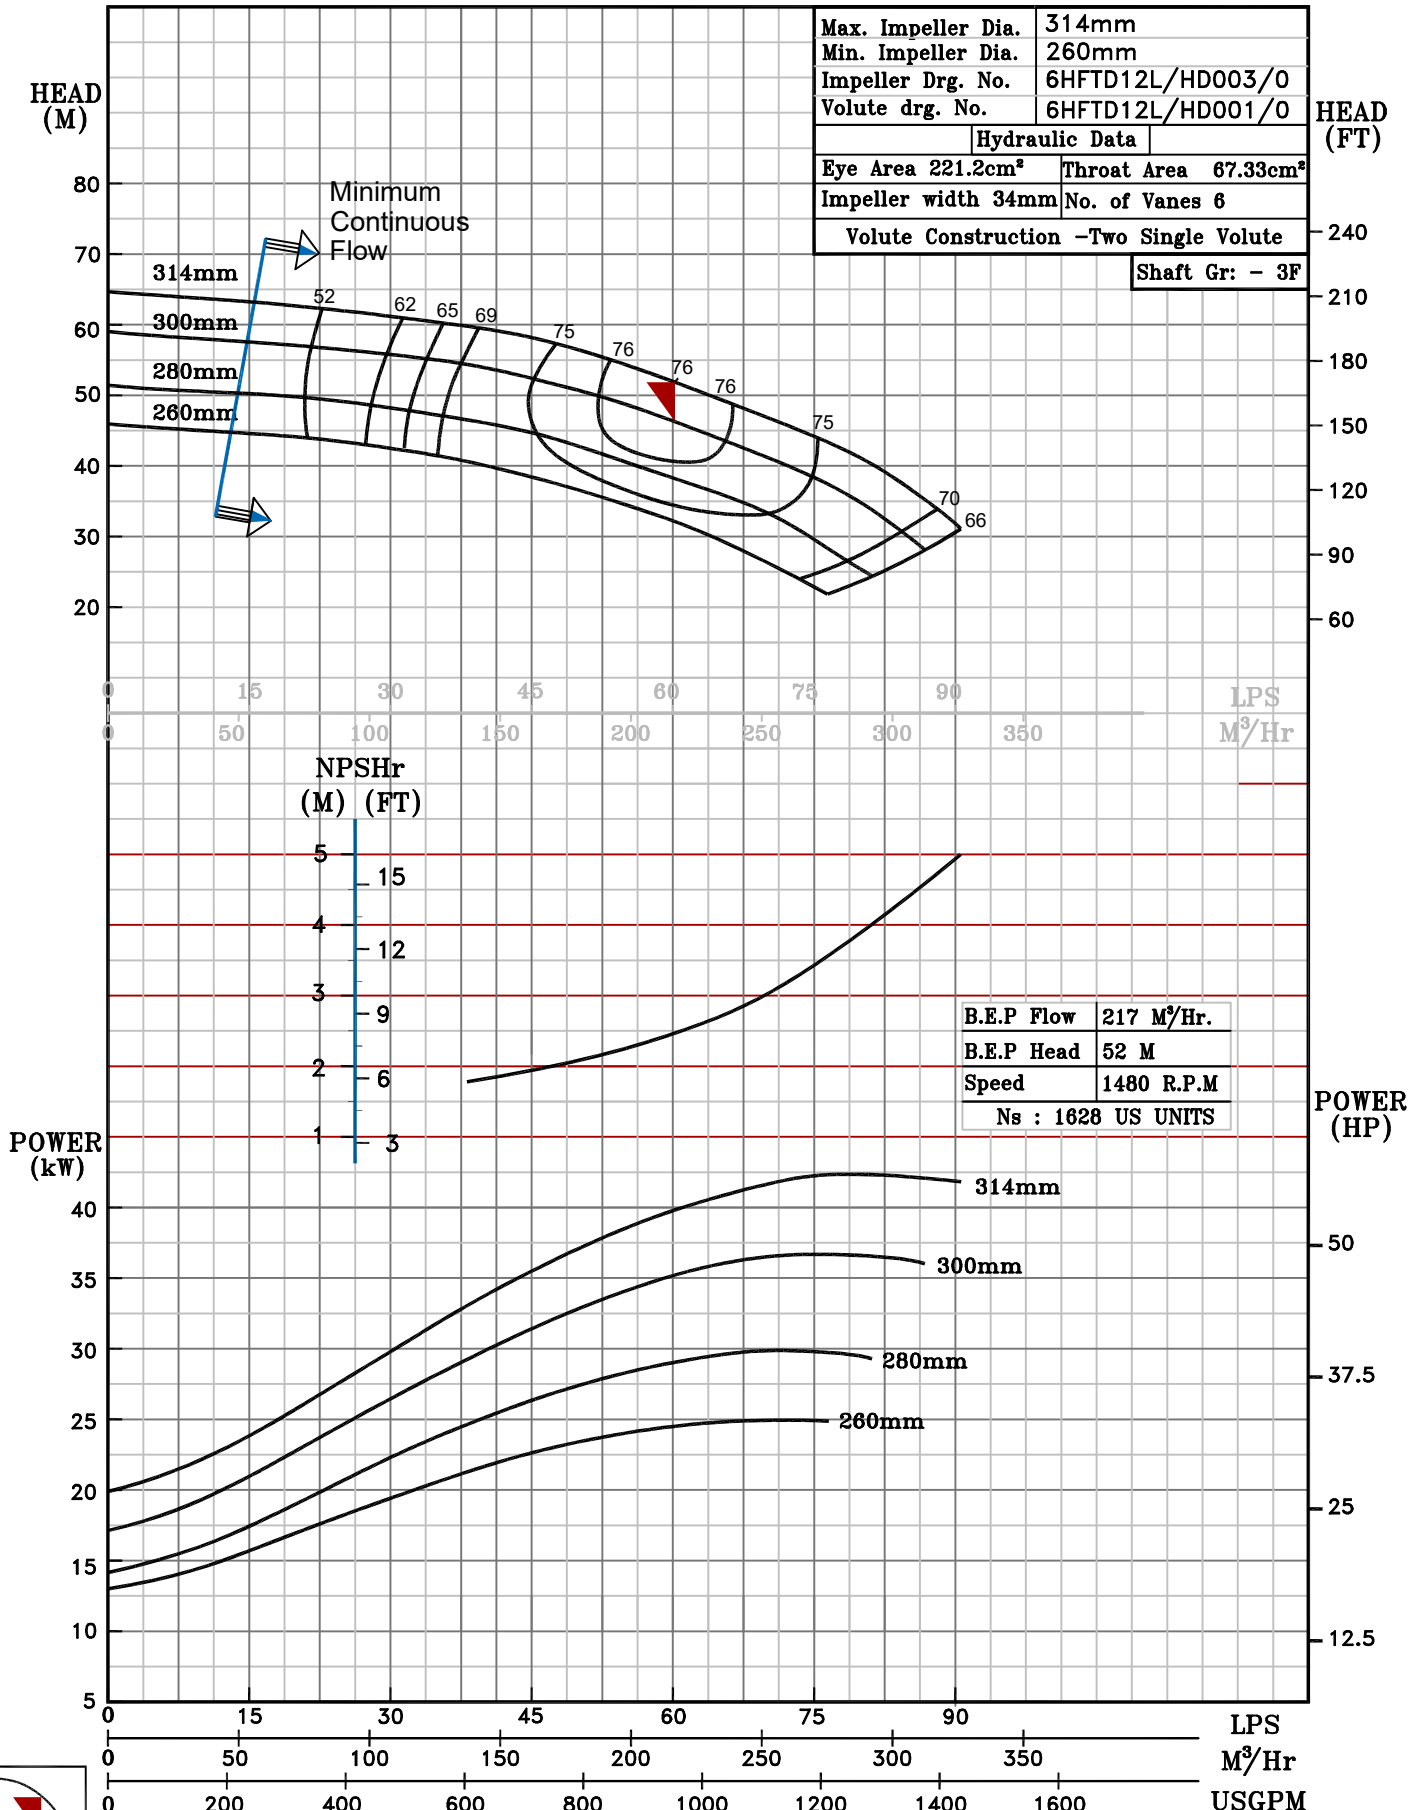

B.E.P

1480 RPM