

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 200HA @1465 R.P.M

200HA/X/202654



PUMPSENSE

CSC RANGE



MODEL 200HA	WORKING PRESS. 12 bar
SIZE 250x200-405	TEST PRESS. 18 bar
TYPE-AXIALLY SPLIT CASE SINGLE STAGE	
SPEED 1465 rpm	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

DATE - 10.08.14



PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	405mm
Min. Impeller Dia.	353mm
Impeller Drg. No.	226G030P
Volute Drg. No.	226G010P
Hydraulic Data	
Eye Area 504cm <sup>2</sup>	Throat Area 210cm <sup>2</sup>
Impeller Width 60mm	No. of Vanes 7
Volute Construction - Double Volute	

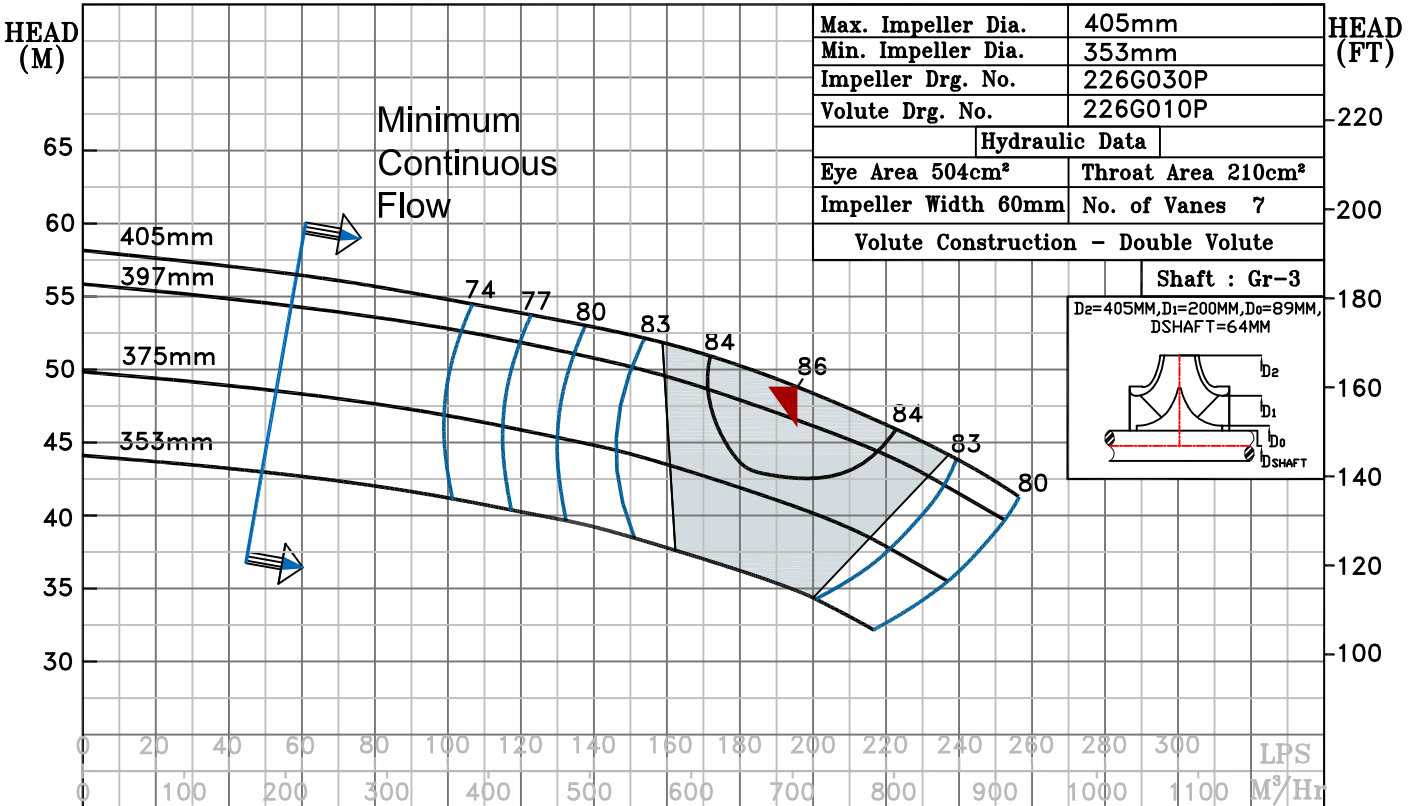

B.E.P Flow	712 M <sup>3</sup> /Hr.
B.E.P Head	49.2 M
Speed	1465 R.P.M
Ns	1811 US UNITS

NPSHr  
(M) (FT)

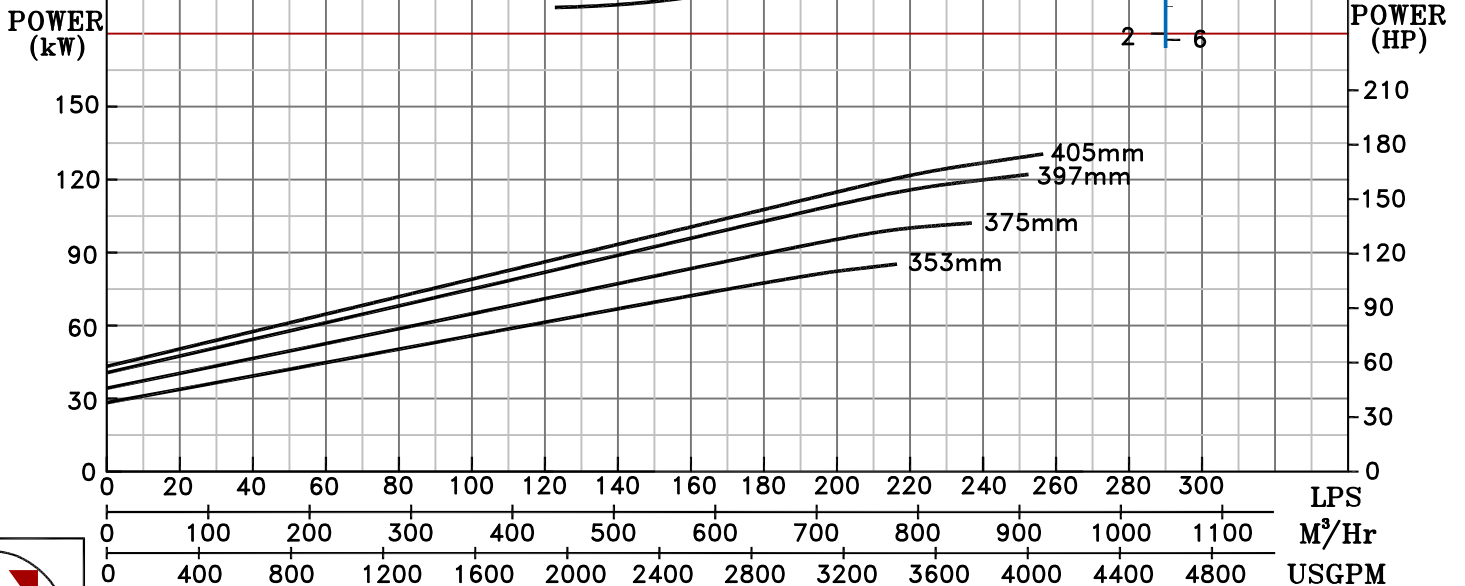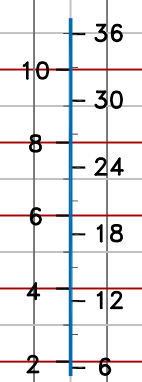

1465 RPM