

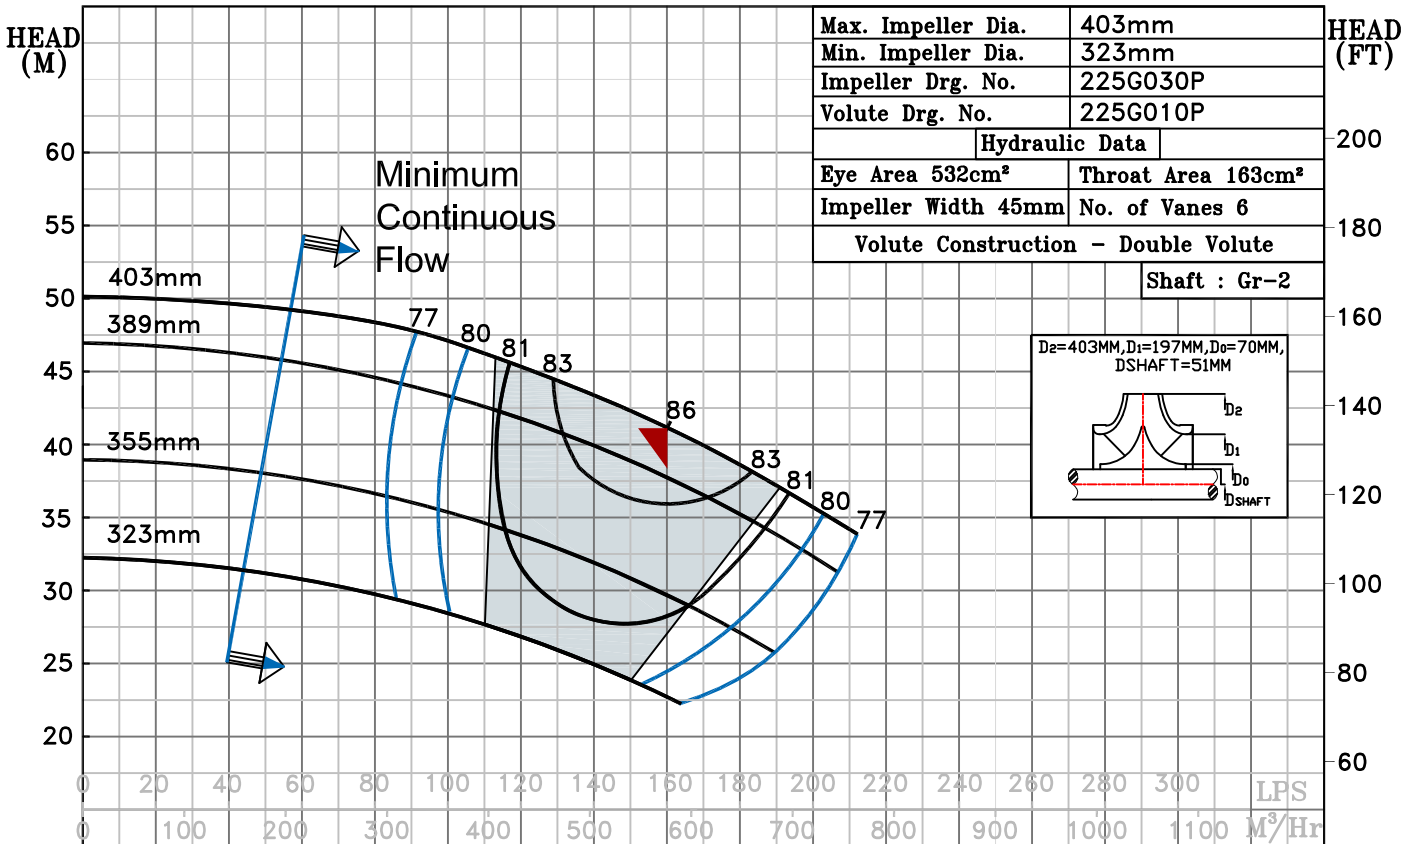


NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 200HB @1465 R.P.M		200HB/X/202554	
 <h1>PUMPSENSE</h1> <p>CSC RANGE</p>	<b>MODEL 200HB</b>	WORKING PRESS.	12 bar
	SIZE 200x200-403	TEST PRESS.	18 bar
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE		
	SPEED 1465 rpm		
SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE			DATE - 10.08.14



PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	403mm
Min. Impeller Dia.	323mm
Impeller Drg. No.	225G030P
Volute Drg. No.	225G010P
Hydraulic Data	
Eye Area 532cm <sup>2</sup>	Throat Area 163cm <sup>2</sup>
Impeller Width 45mm	No. of Vanes 6
Volute Construction - Double Volute	
Shaft : Gr-2	



B.E.P Flow	575 M <sup>3</sup> /Hr.
B.E.P Head	41.5 M
Speed	1465 R.P.M
Ns	: 1849 US UNITS

NPSHr  
(M) (FT)

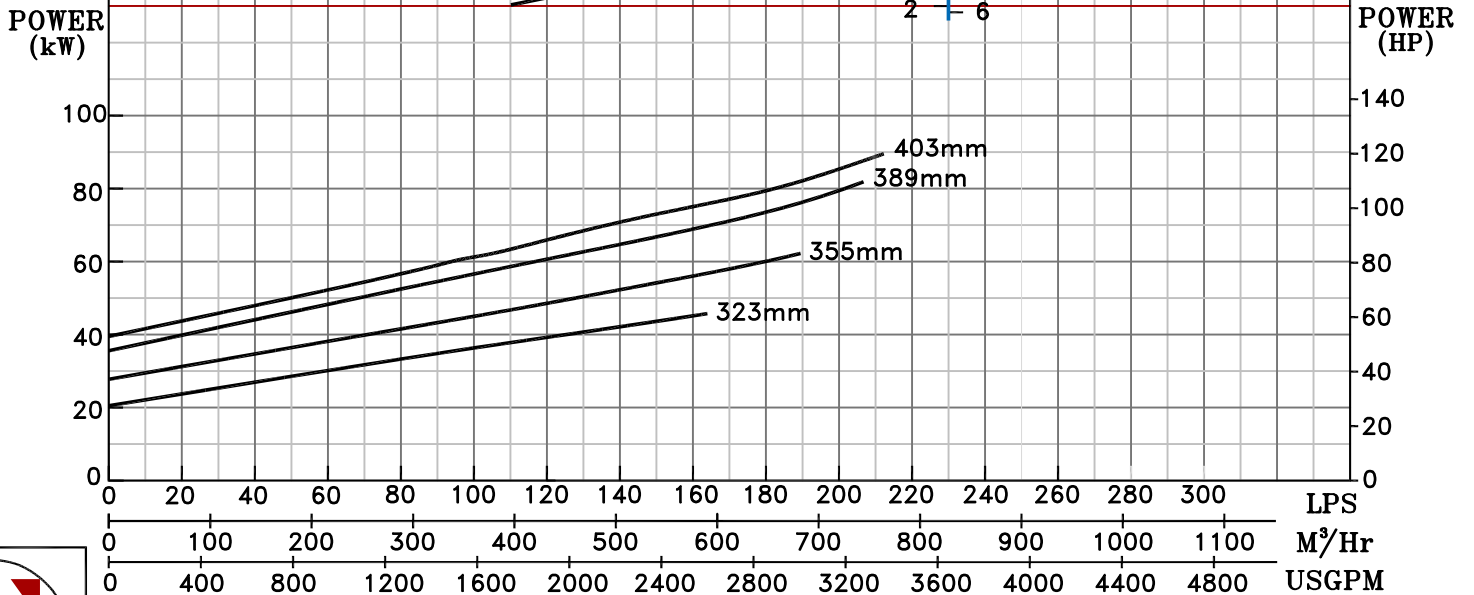

1465 RPM