
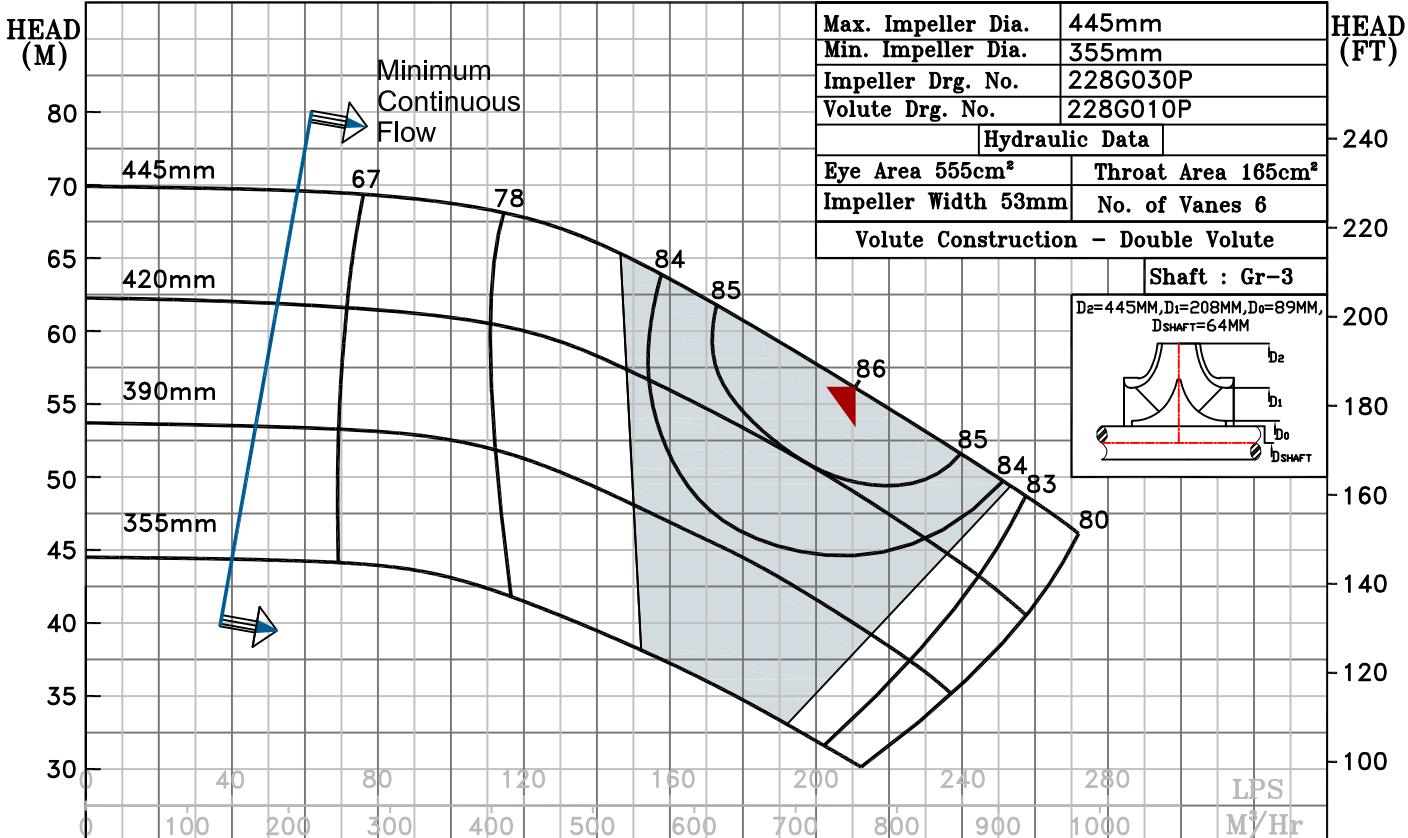



NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 200HH @1480 R.P.M		200HH/Y/202854	
 <h1>PUMPSENSE</h1> <p>CSC RANGE</p>	<b>MODEL 200HH</b>	WORKING PRESS. 16 bar	
	SIZE 250x200-445	TEST PRESS. 24 bar	
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE		SPEED 1480 rpm
SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE			DATE - 10.12.14



PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	445mm
Min. Impeller Dia.	355mm
Impeller Drg. No.	228G030P
Volute Drg. No.	228G010P
Hydraulic Data	
Eye Area 555cm <sup>2</sup>	Throat Area 165cm <sup>2</sup>
Impeller Width 53mm	No. of Vanes 6
Volute Construction - Double Volute	



B.E.P Flow	761 M <sup>3</sup> /Hr.
B.E.P Head	56.09 M
Speed	1480 R.P.M
Ns :	1715 US UNITS

NPSHr  
(M) (FT)

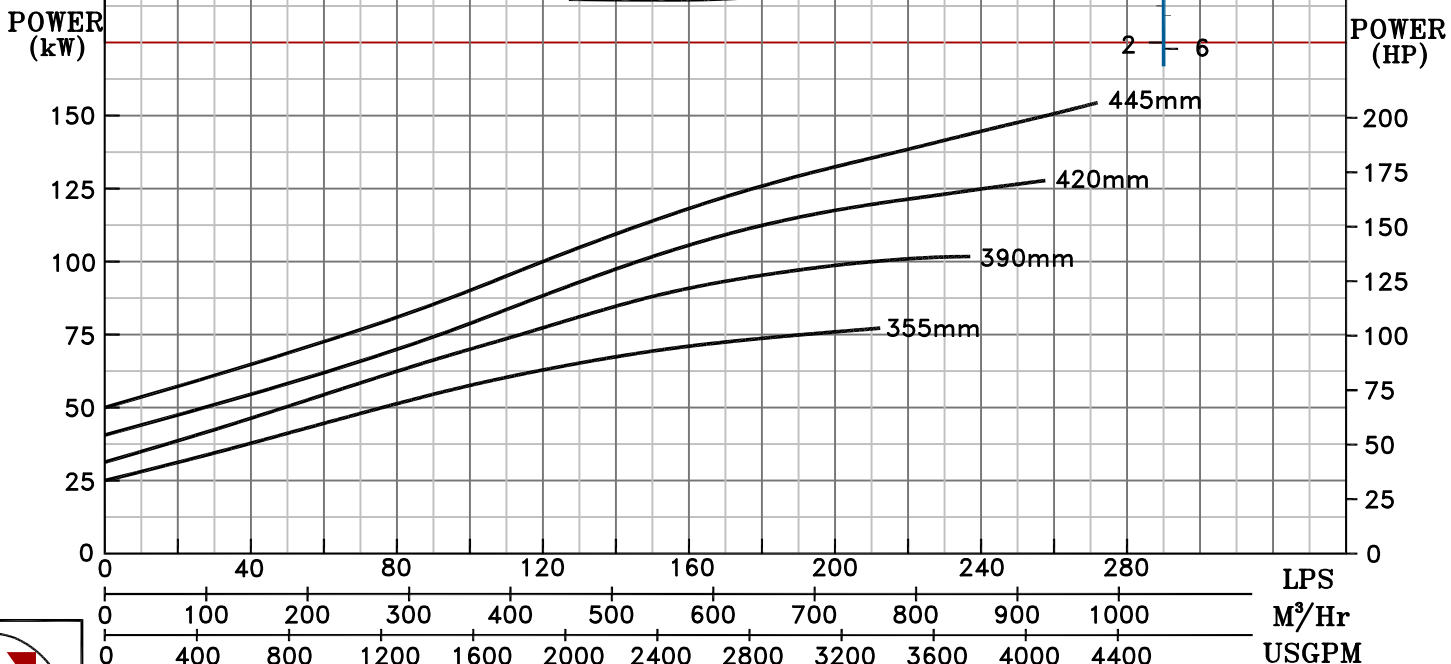

1480 RPM