
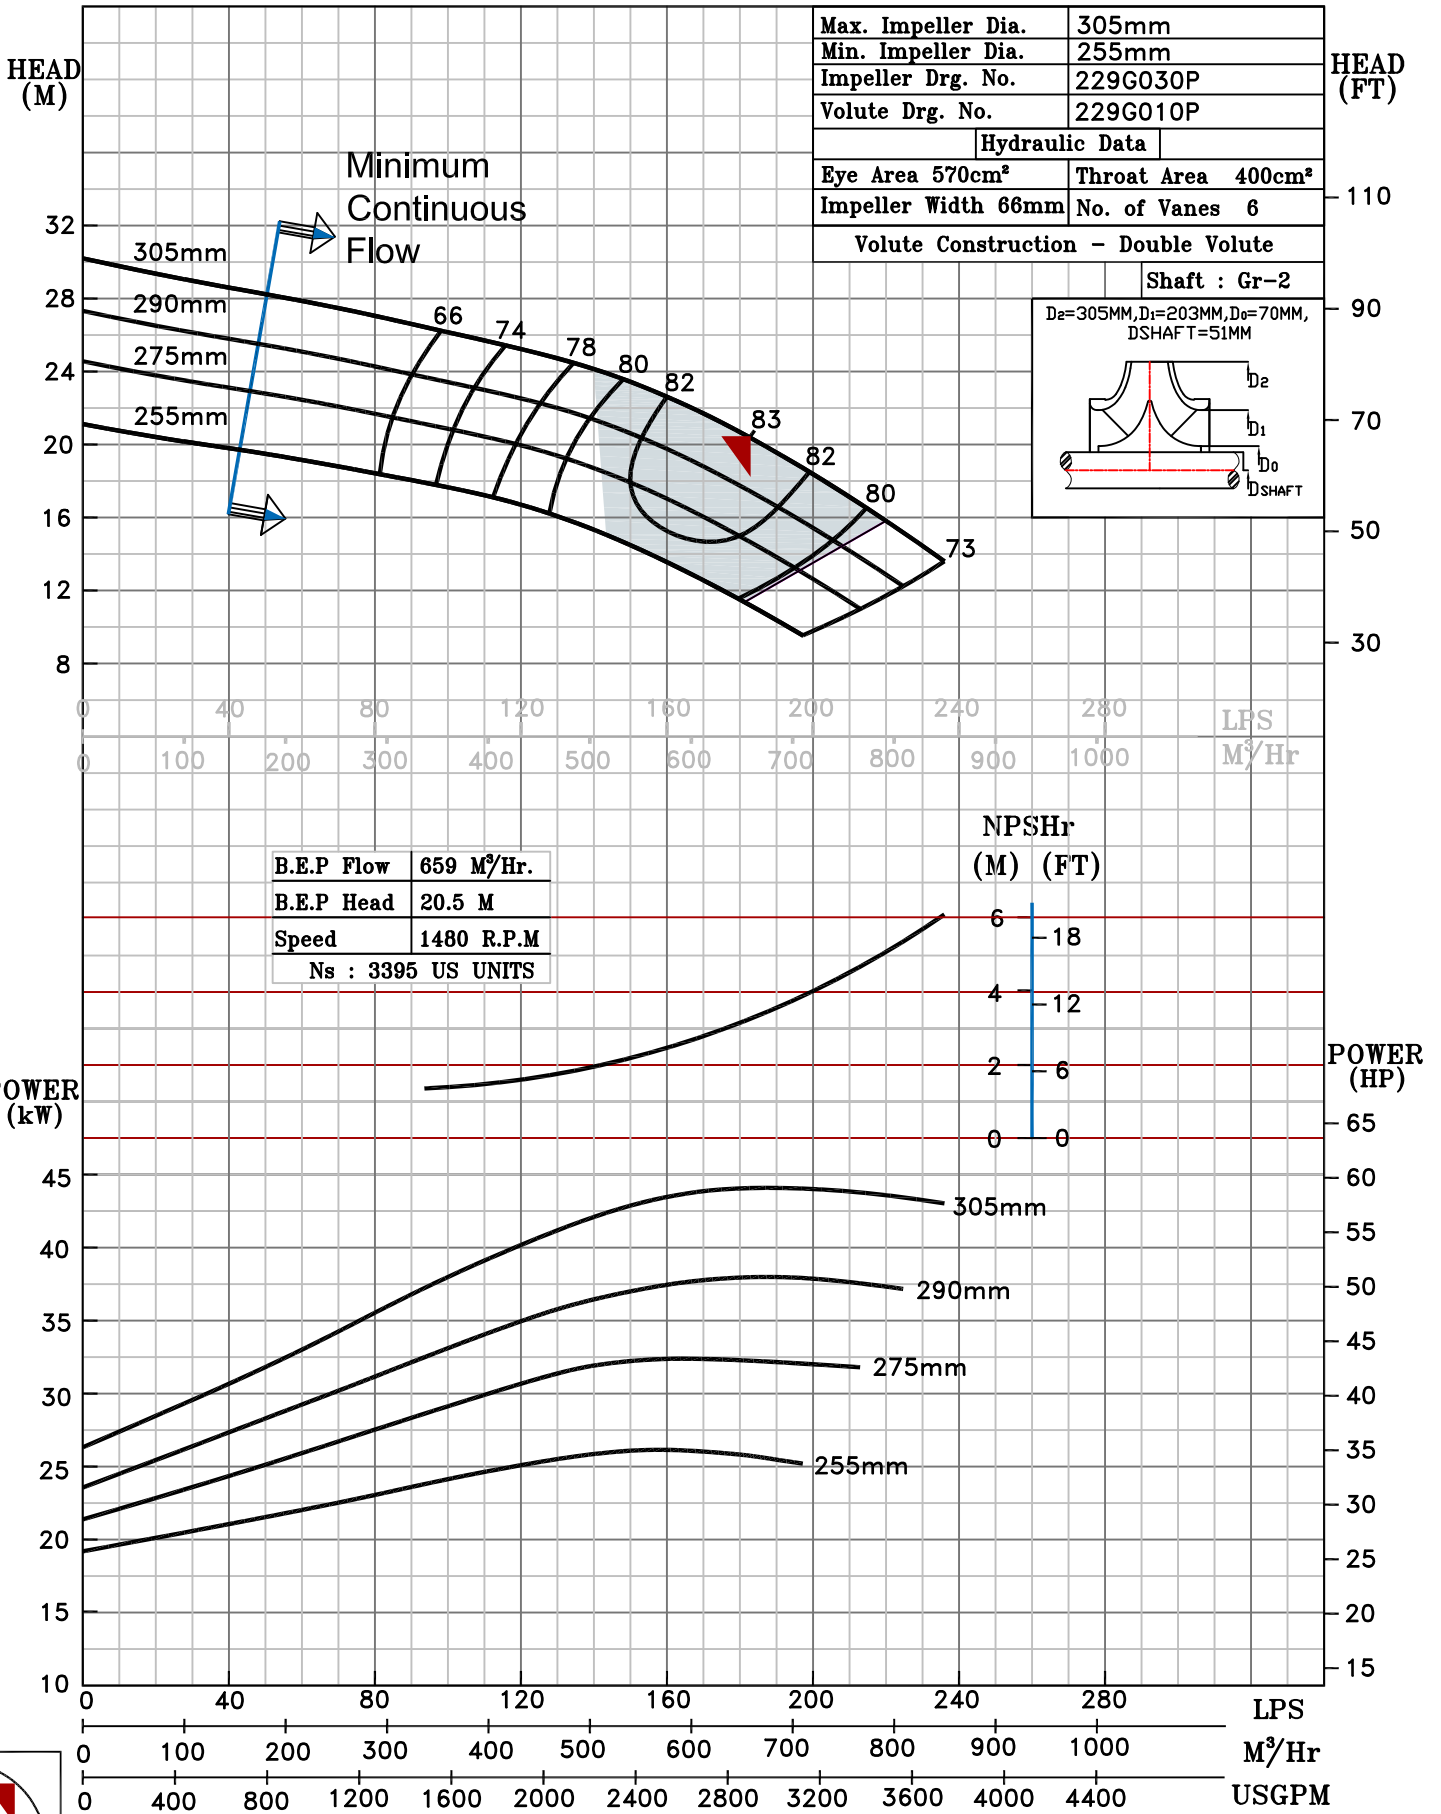



NOTE- PERFORMANCE AS PER ISO 9906-GRADE-2B

PERFORMANCE CURVE OF 250LA @1480 R.P.M		250LA/Y/202954	
 <h1>PUMPSENSE</h1> <p><i>HS RANGE</i></p>	MODEL 250LA	WORKING PRESS. 16 bar	
	SIZE 250x250-305	TEST PRESS. 24 bar	
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE		
	SPEED 1480 rpm		
SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE			DATE - 10.12.14

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	305mm
Min. Impeller Dia.	255mm
Impeller Drg. No.	229G030P
Volute Drg. No.	229G010P
Hydraulic Data	
Eye Area 570cm ²	Throat Area 400cm ²
Impeller Width 66mm	No. of Vanes 6
Volute Construction - Double Volute	



1480 RPM