


NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

|   |                                  |                       |
|---|----------------------------------|-----------------------|
| <b>PERFORMANCE CURVE OF ES 100-315 @1450 R.P.M</b>  |                                  | ES 100-315/X/402854   |
| <h1 style="margin: 0;">PUMPSENSE</h1> <p style="margin: 0;"><i>ISO 2858</i></p> <p style="margin: 0;"><i>ES RANGE</i></p> | <b>MODEL ES 100-315</b>          | WORKING PRESS. 16 bar |
|   | SIZE 125x100-332                 | TEST PRESS. 24 bar    |
|   | TYPE - END SUCTION BACK PULL OUT |                       |
|   |                                  | SPEED 1450 rpm        |

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE  
 PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

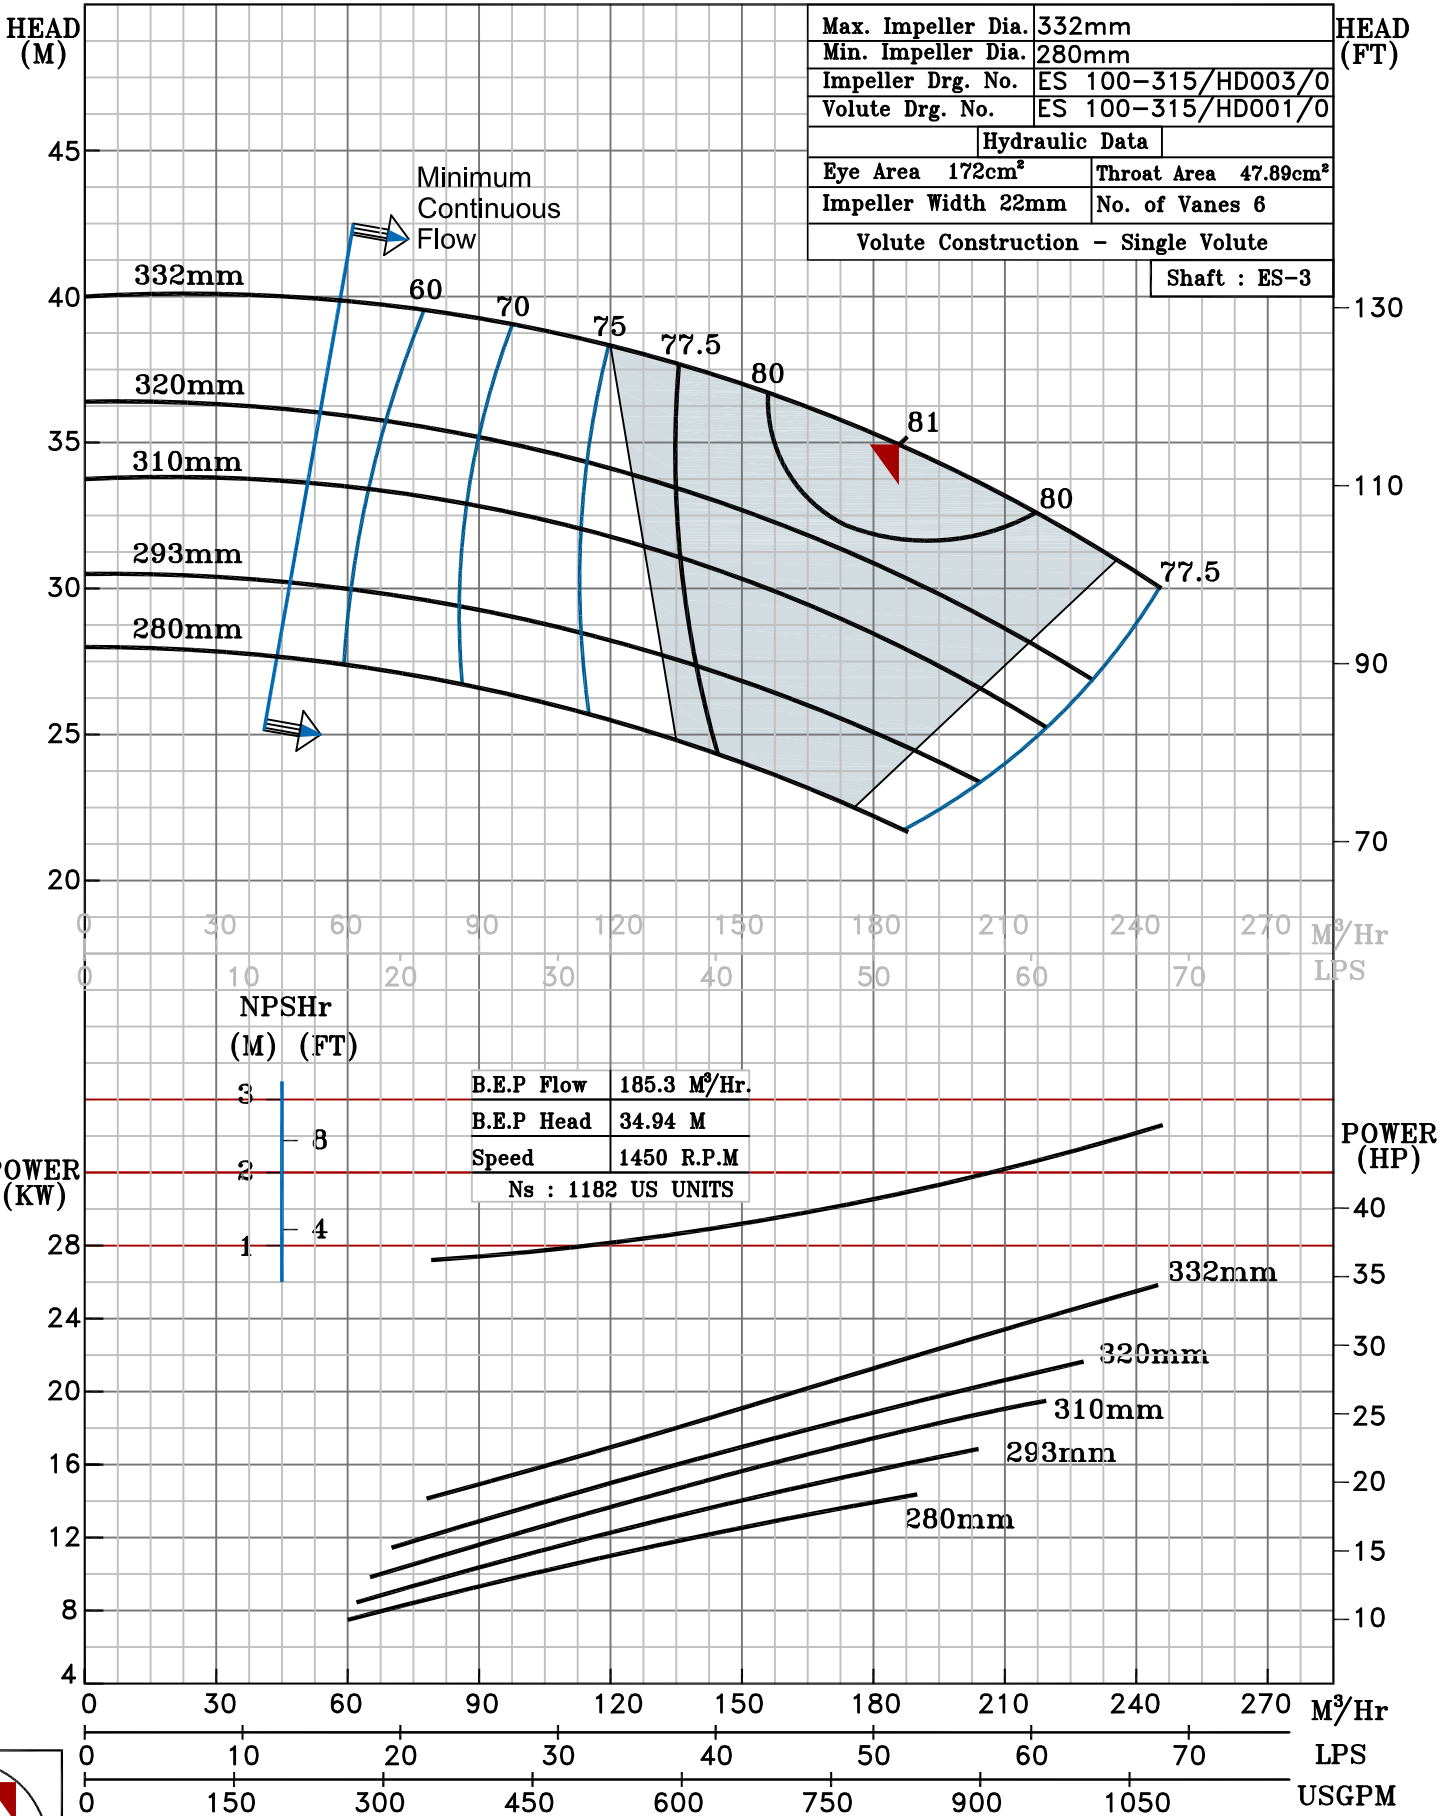

1450 RPM