

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF ES 150-315 @2900 R.P.M

ES 150-315/X/403652



PUMPSENSE

ISO 2858

MODEL ES 150-315

WORKING PRESS. 16 bar

ES RANGE

SIZE 200x150-328

TEST PRESS. 24 bar


TYPE - END SUCTION BACK PULL OUT

SPEED 2900 rpm

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	328mm
Min. Impeller Dia.	264mm
Impeller Drg. No.	436G030P
Volute Drg. No.	436G010P
Hydraulic Data	
Eye Area 284cm <sup>2</sup>	Throat Area 121.2cm <sup>2</sup>
Impeller Width 43mm	No. of Vanes 6
Volute Construction - Single Volute	
Shaft : ES-4	

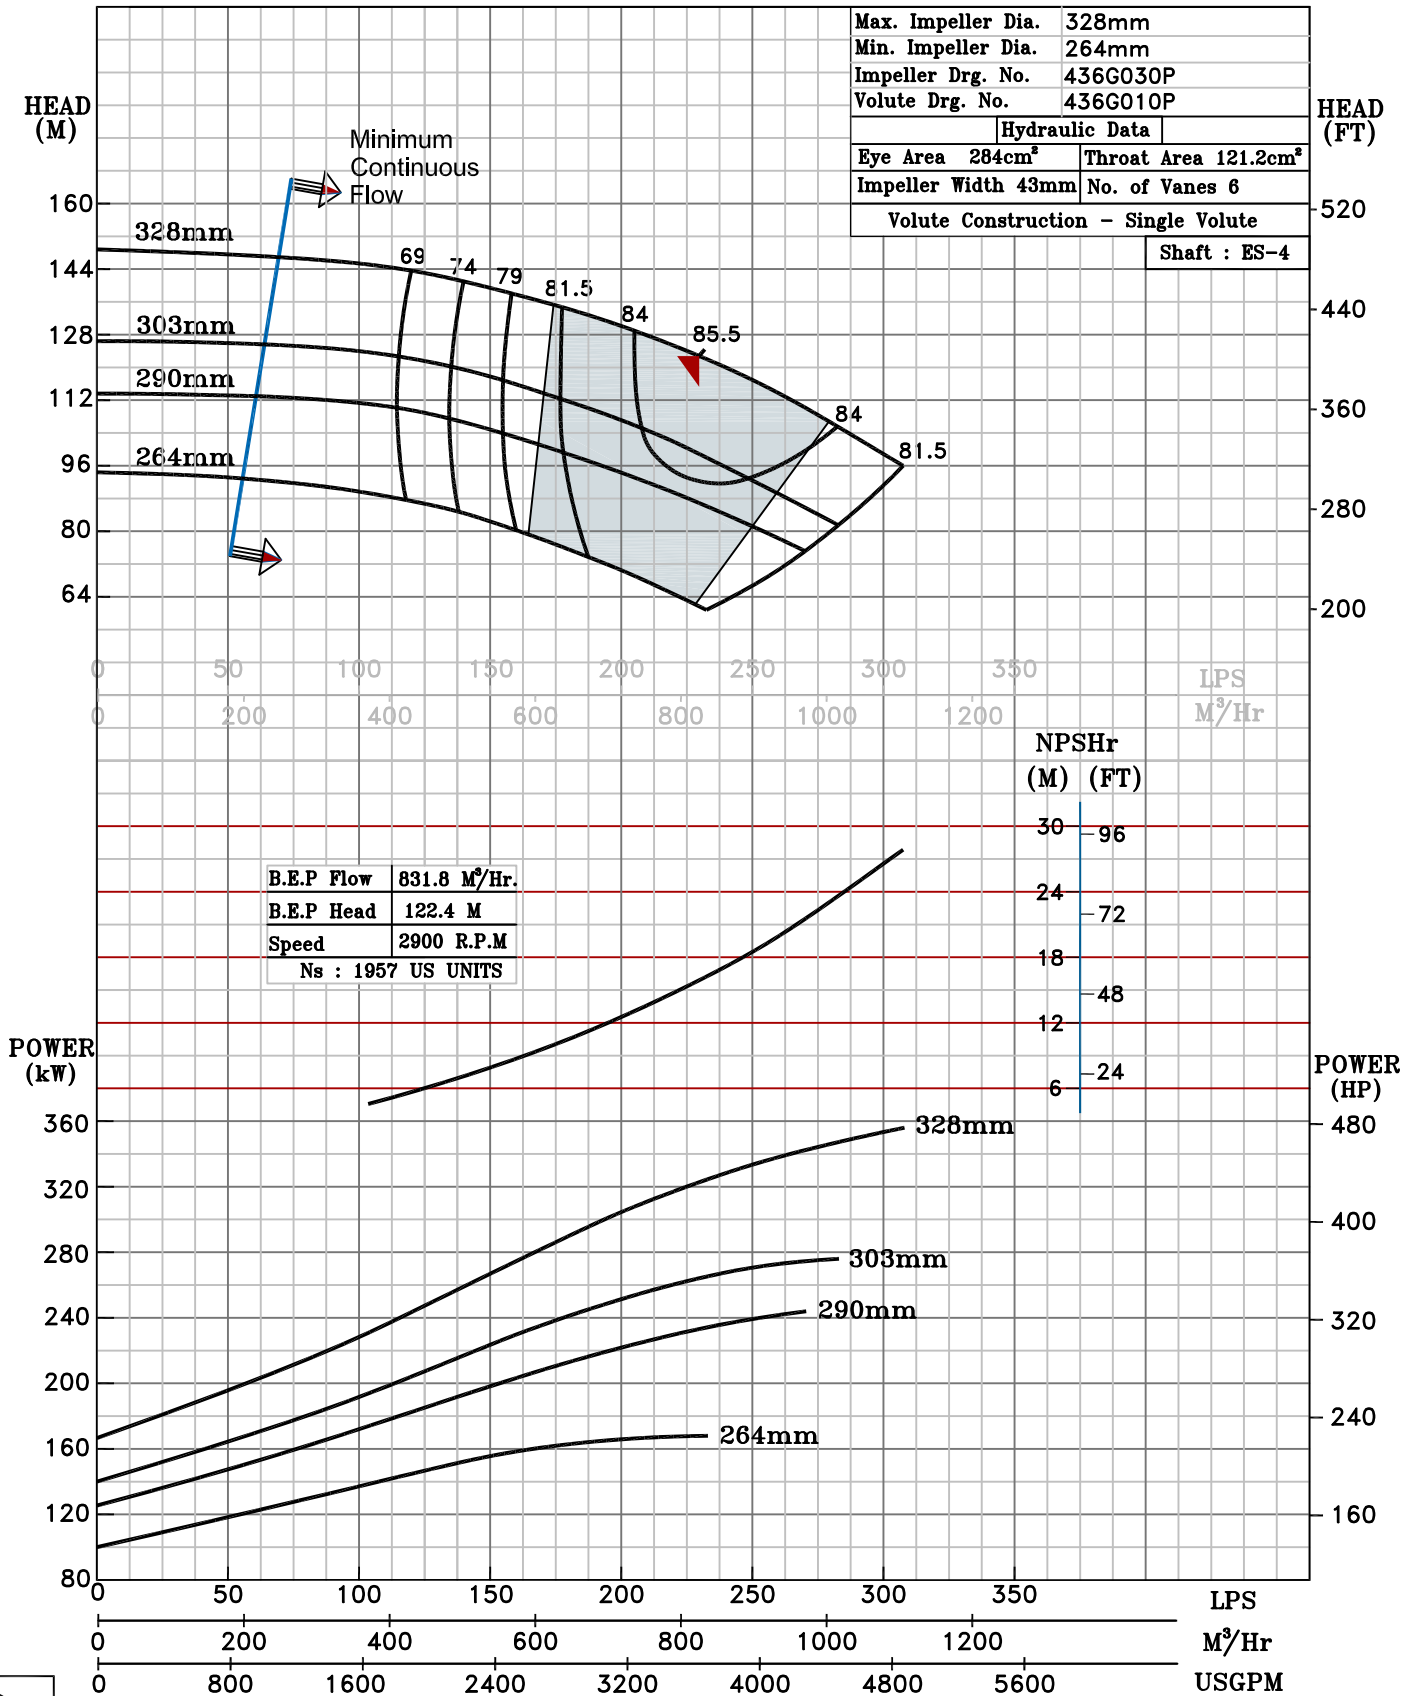

2900 RPM