
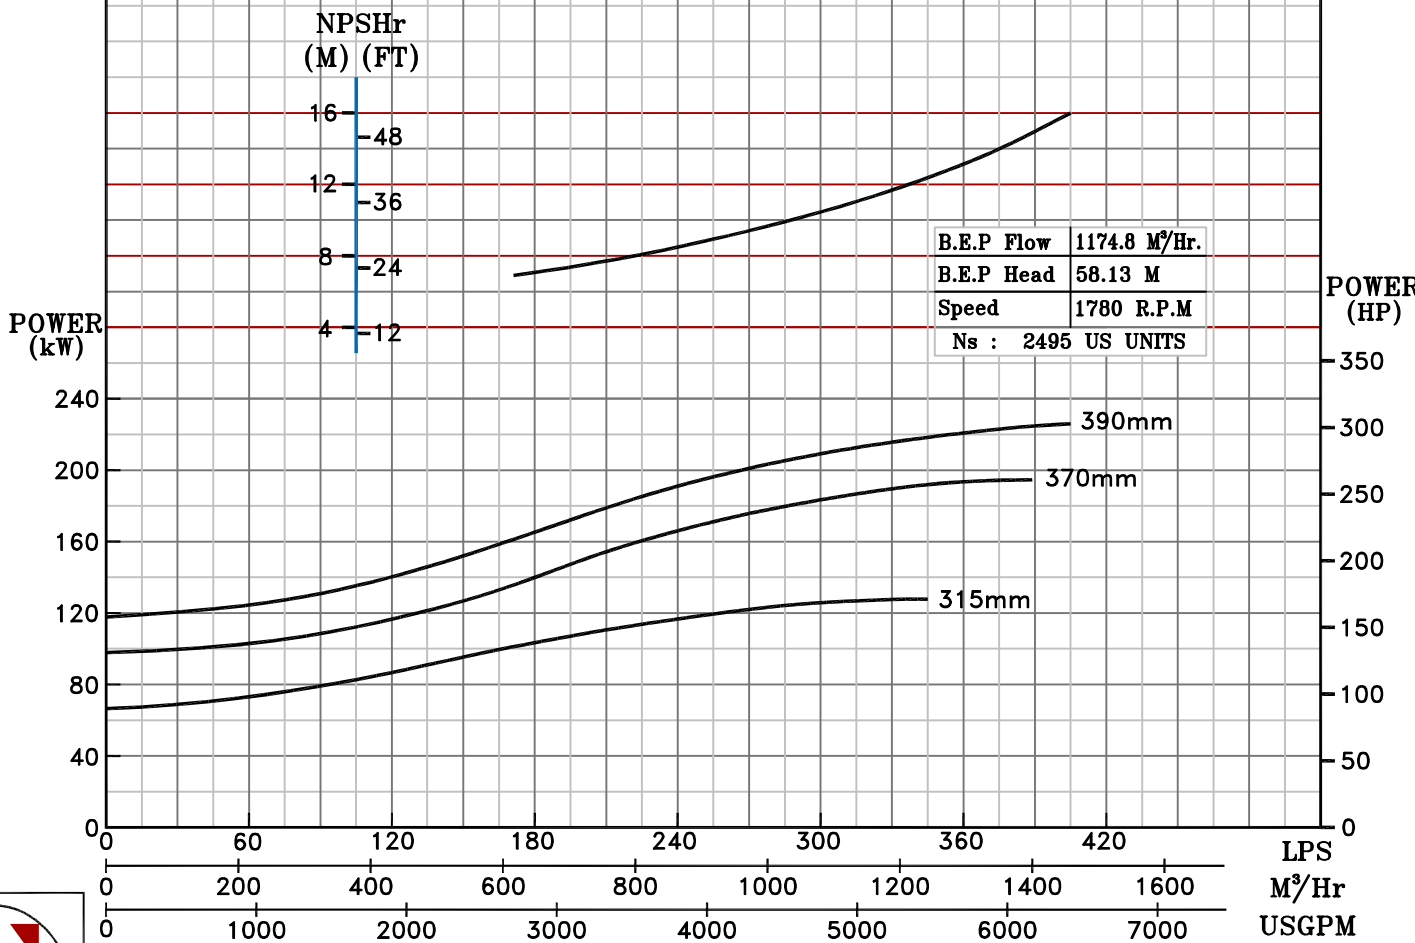
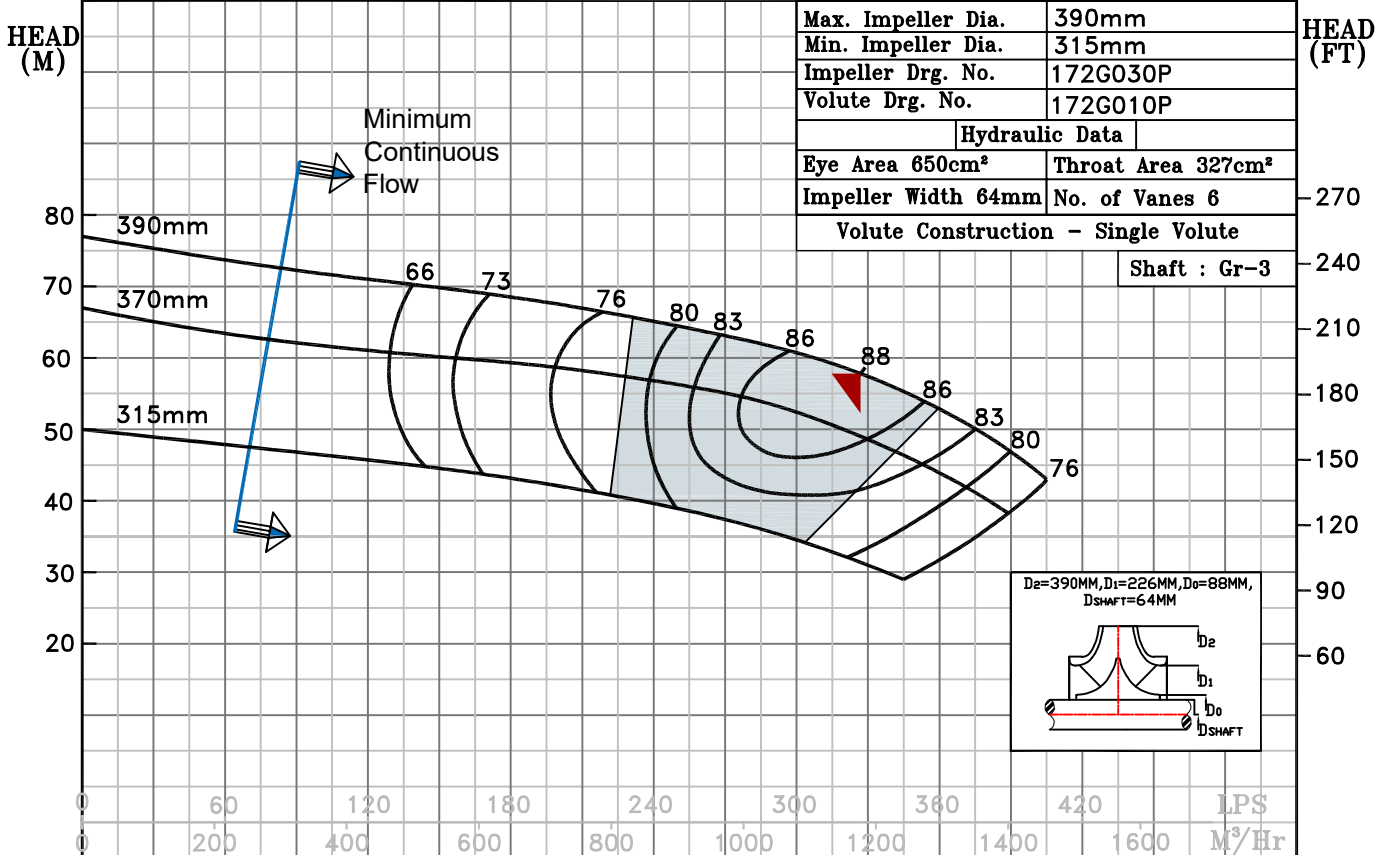


NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10HS15L @1780 R.P.M		10HS15L/Y/107264	
	MODEL 10HS15L	WORKING PRESS.	16 bar
	SIZE 300x250-390	TEST PRESS.	24 bar
	TYPE-AXIALLY SPLIT CASE SINGLE STAGE		
HS RANGE		SPEED 1780 rpm	
		DATE - 06.10.2022	

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE
 PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Max. Impeller Dia.	390mm
Min. Impeller Dia.	315mm
Impeller Drg. No.	172G030P
Volute Drg. No.	172G010P
Hydraulic Data	
Eye Area 650cm ²	Throat Area 327cm ²
Impeller Width 64mm	No. of Vanes 6
Volute Construction - Single Volute	
Shaft : Gr-3	



1780 RPM