

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10HS15L @980 R.P.M

10HS15L/Y/107256



HS RANGE

MODEL 10HS15L

WORKING PRESS. 16 bar

SIZE 300x250-390

TEST PRESS. 24 bar


TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 980 rpm



DATE - 06.10.2022

SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

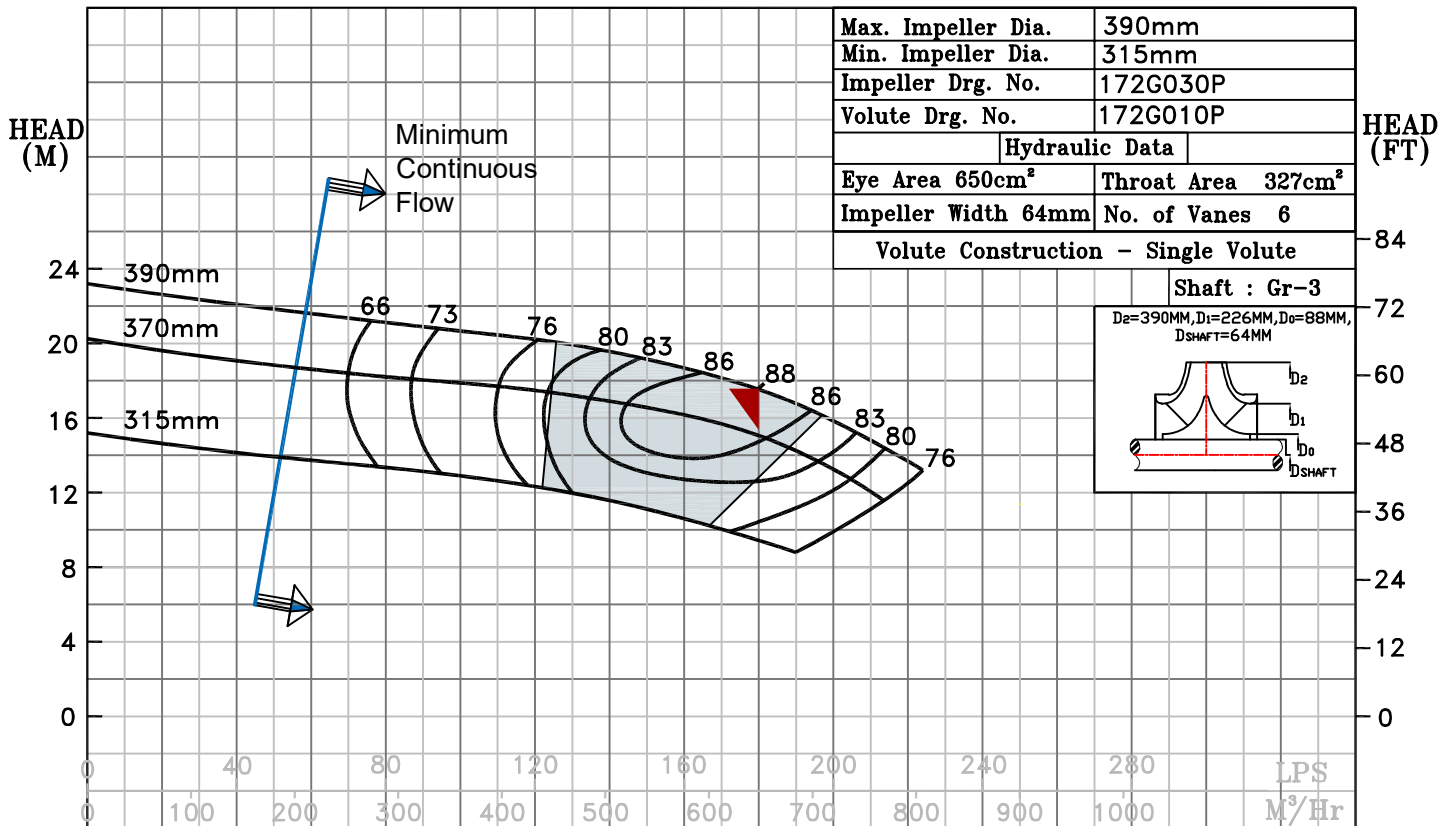

Max. Impeller Dia.	390mm
Min. Impeller Dia.	315mm
Impeller Drg. No.	172G030P
Volute Drg. No.	172G010P
Hydraulic Data	
Eye Area 650cm²	Throat Area 327cm²
Impeller Width 64mm	No. of Vanes 6
Volute Construction - Single Volute	

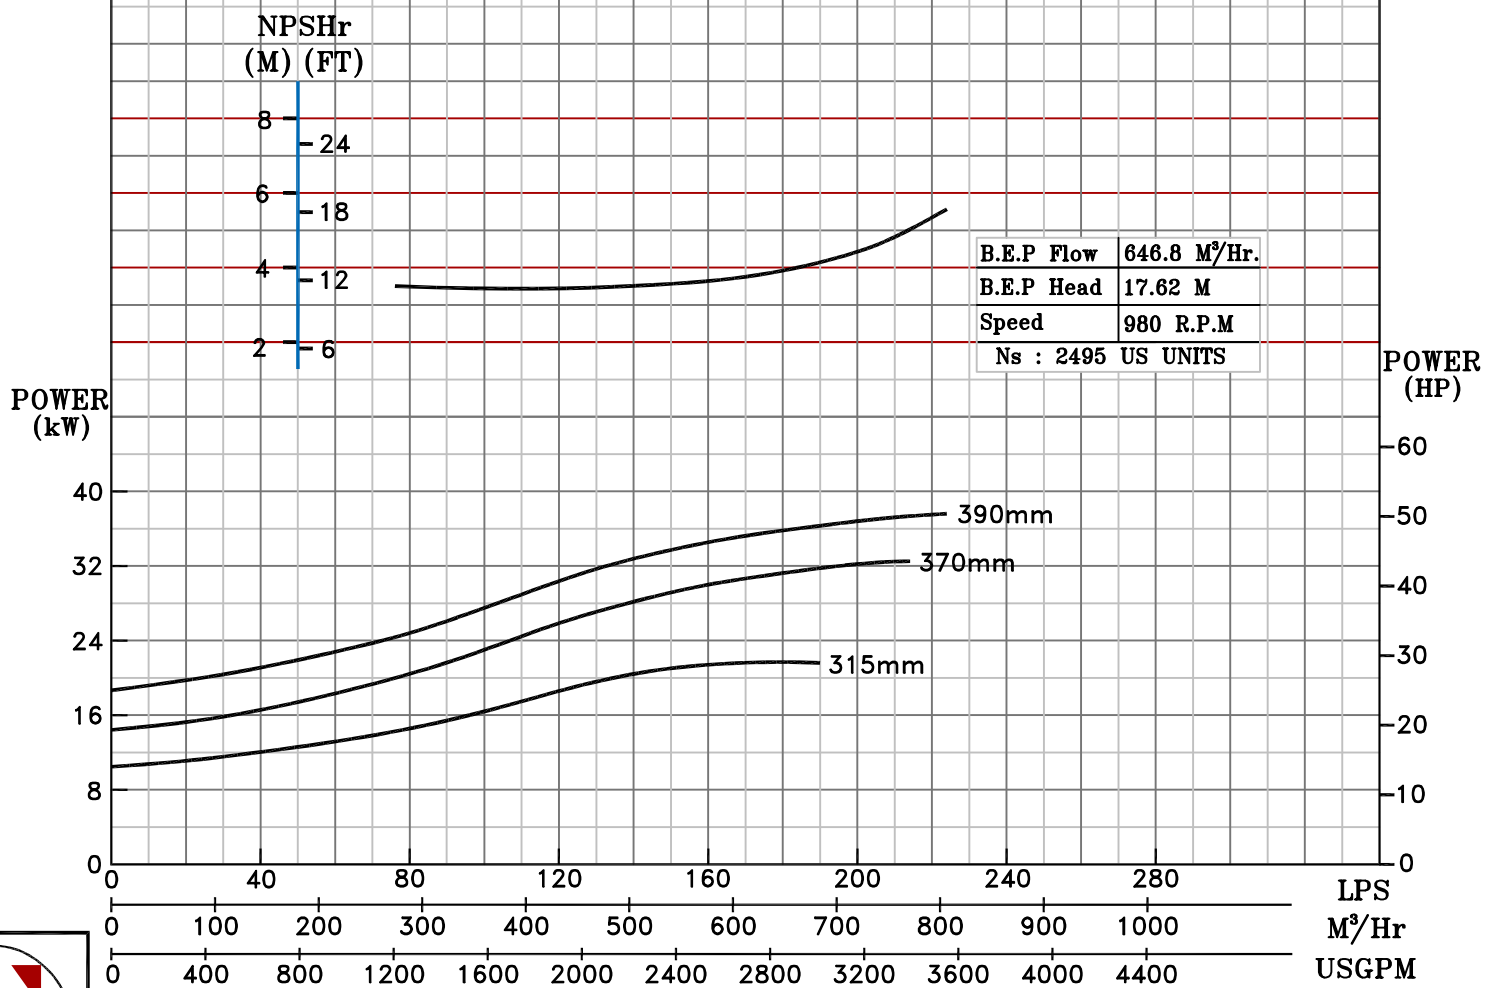

980 RPM