

NOTE- PERFORMANCE AS PER ISO 9906 GRADE-2B

PERFORMANCE CURVE OF 10HS17L @980 R.P.M

10HS17L/Y/106856



HS RANGE

MODEL 10HS17L

WORKING PRESS. 16 bar

SIZE 250x250-460

TEST PRESS. 24 bar


TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 980 rpm

DATE - 06.10.2022



SHADED REGION ON THE H-Q CURVE REPRESENTS OPTIMUM SELECTION ZONE

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

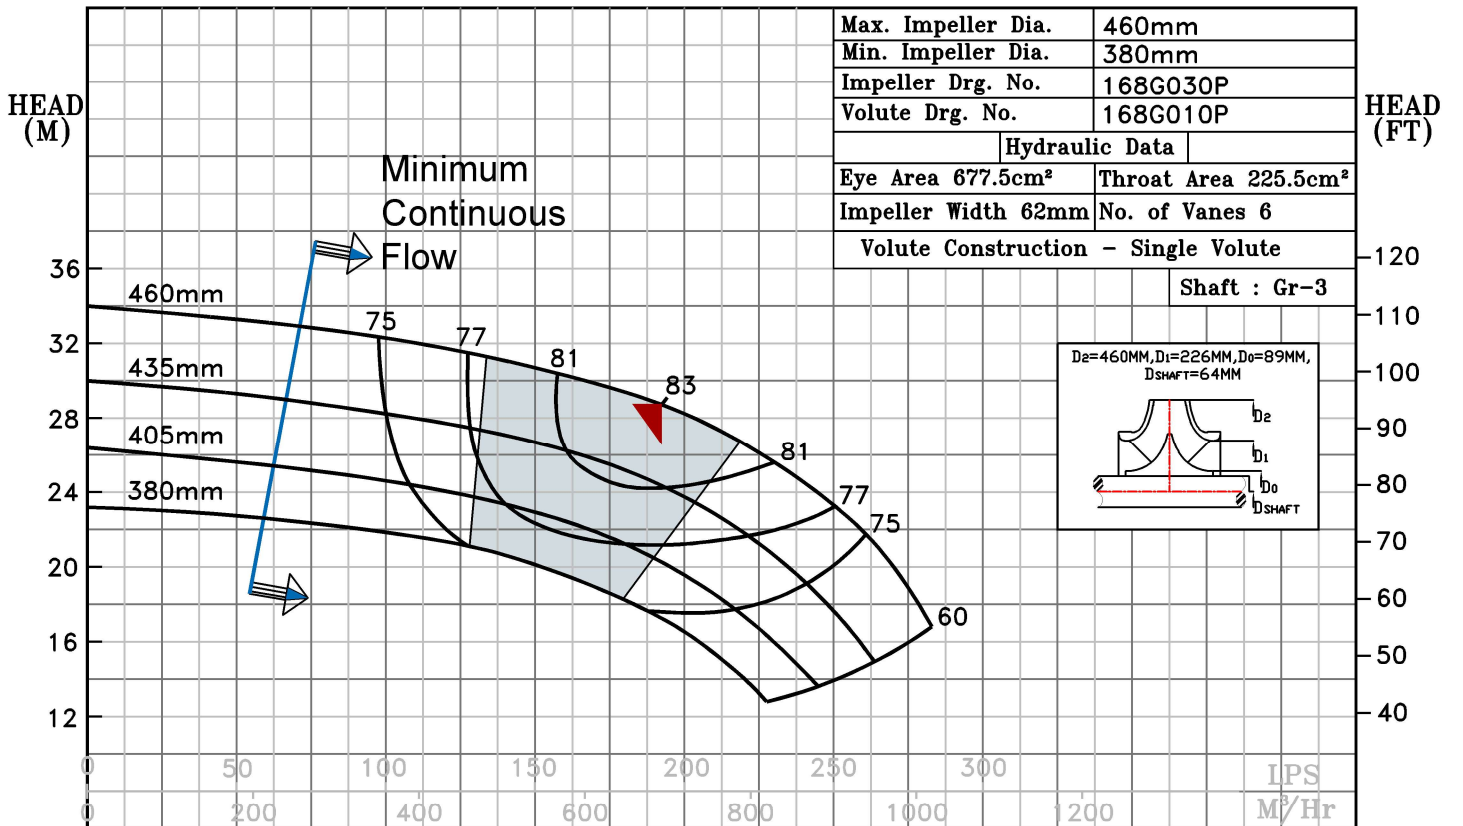

B.E.P Flow	688.6 M ³ /Hr.
B.E.P Head	28.8 M
Speed	980 R.P.M
Ns : 1781 US UNITS	

NPSHr	
(M)	(FT)
6	18
4	12
2	6
0	0

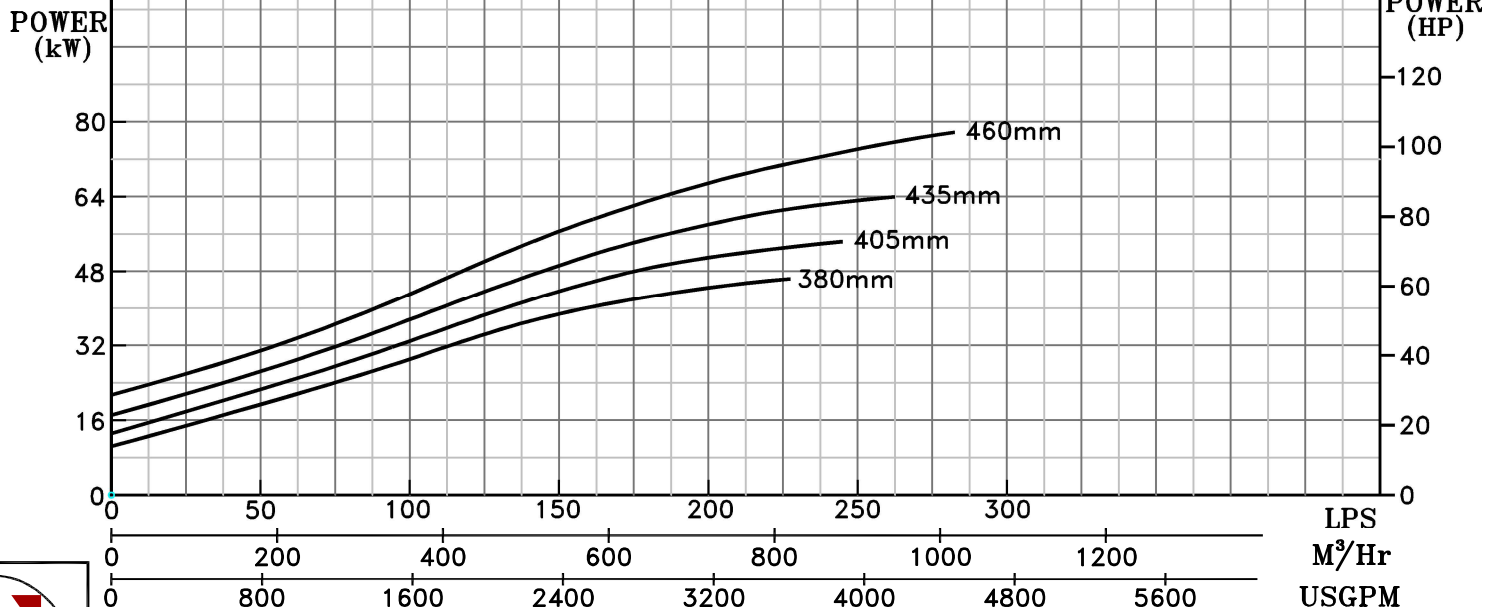

980 RPM