

TEST CURVE OF 4HF12 @2600 R.P.M



HF RANGE

MODEL 4HF12

SIZE 150x100-310



TYPE-AXIALLY SPLIT CASE SINGLE STAGE


RATED CAPACITY - 750 USGPM

SPEED 2600 rpm

TEST DATE- 23.01.19


PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0

Curve No.	8019A	Max. Impeller Dia.	310mm
Impeller No.	819G030PJ	Min. Impeller Dia.	264mm
		Shaft	Gr-1.5F

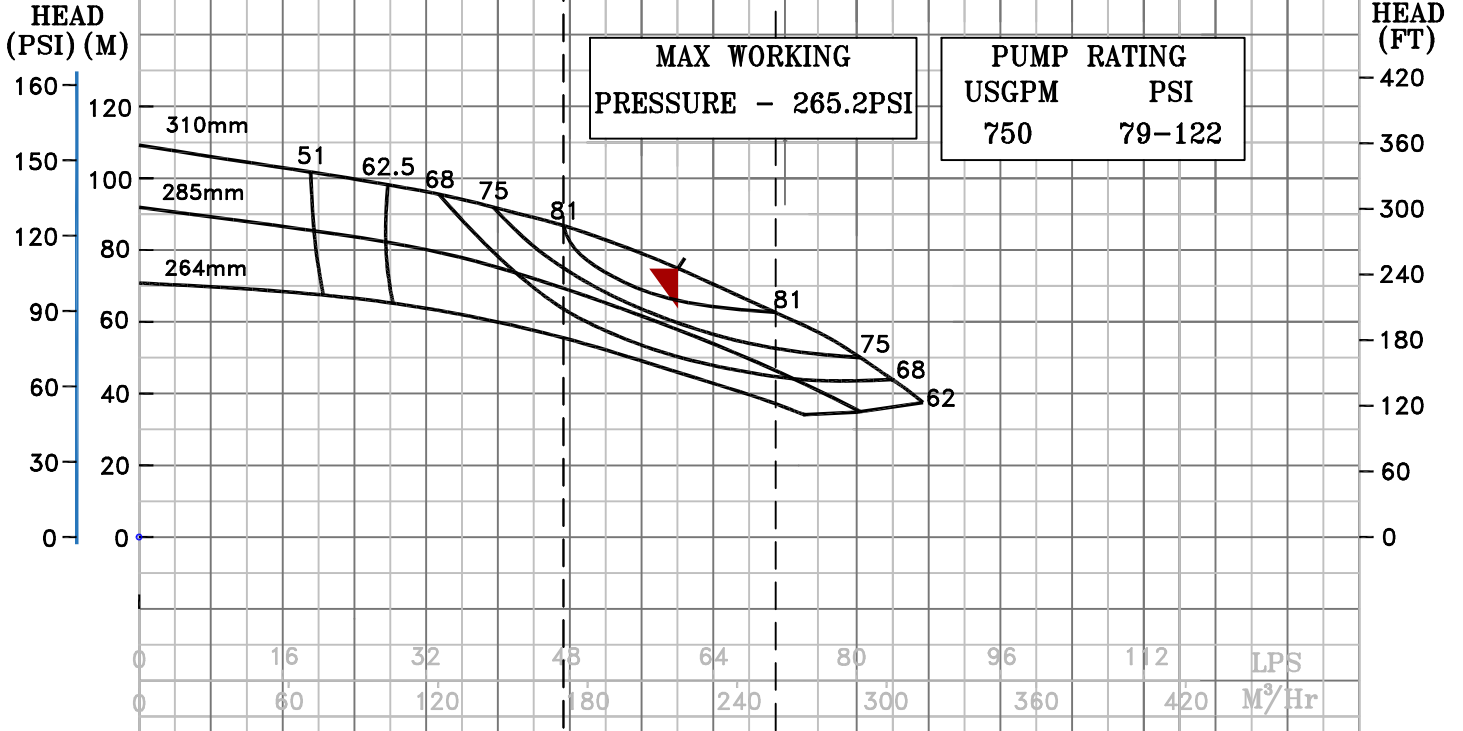

(M)	(FT)
6	18
4	12
2	6
0	0

B.E.P Flow	217 M ³ /Hr.
B.E.P Head	75 M
Speed	2600 R.P.M
Ns	1294 US UNITS

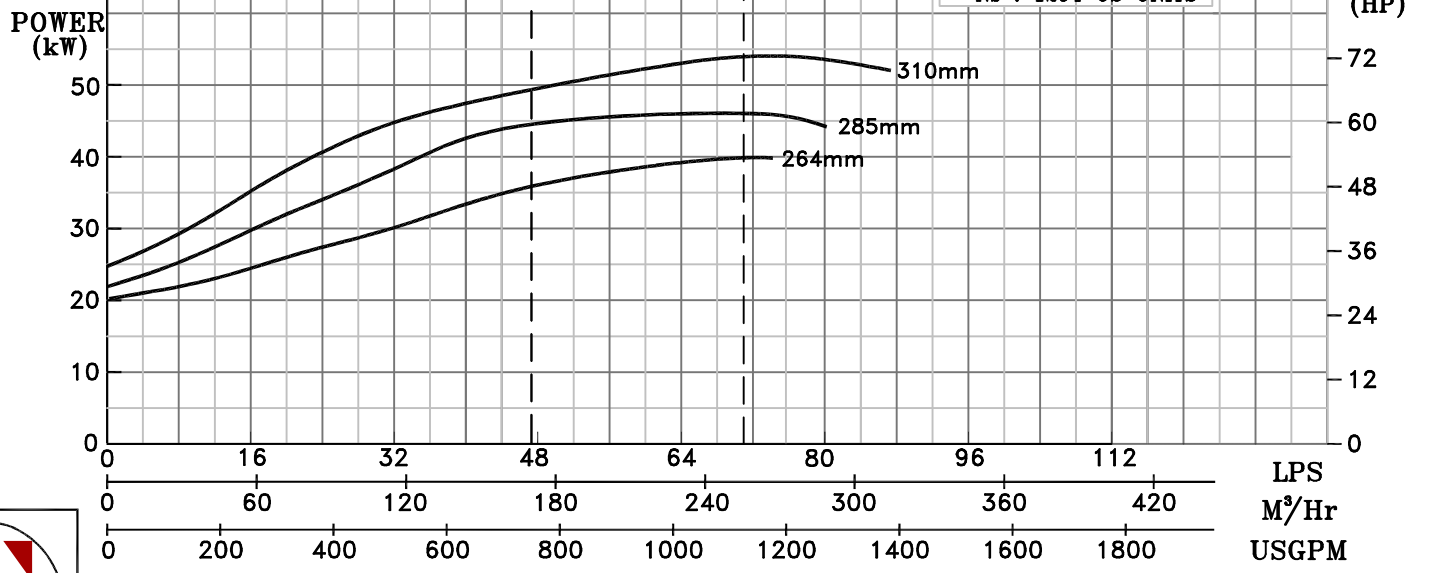

2600 RPM