

# PERFORMANCE CURVE OF 6HF10 @ 2800 R.P.M



HS RANGE



MODEL 6HF10

SIZE 150x150-255

TYPE-AXIALLY SPLIT CASE SINGLE STAGE

SPEED 2800 rpm

TEST DATE- 13.07.21


RATED DUTY - 1000,1250 USGPM

PUMP PERFORMANCE CHARACTERISTICS COMPUTED BASED ON CLEAN COLD WATER S.G 1.0


Curve No.	1079B-FM3
Impeller No.	179G030P-MK2

Max. Impeller Dia.	255mm
Min. Impeller Dia.	214mm


Shaft : Gr-2F

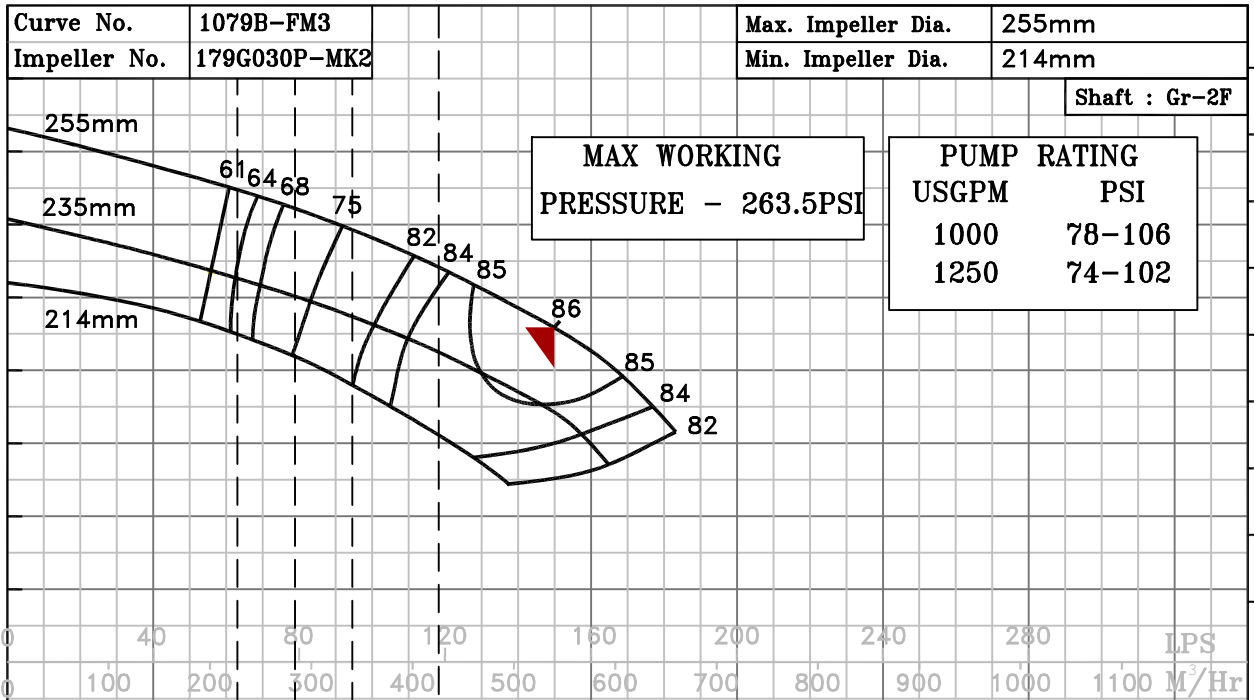

PUMP RATING	
USGPM	PSI
1000	78-106
1250	74-102



B.E.P Flow	539.7 M³/Hr.
B.E.P Head	55.9 M
Speed	2800 R.P.M
Ns	: 2739 US UNITS

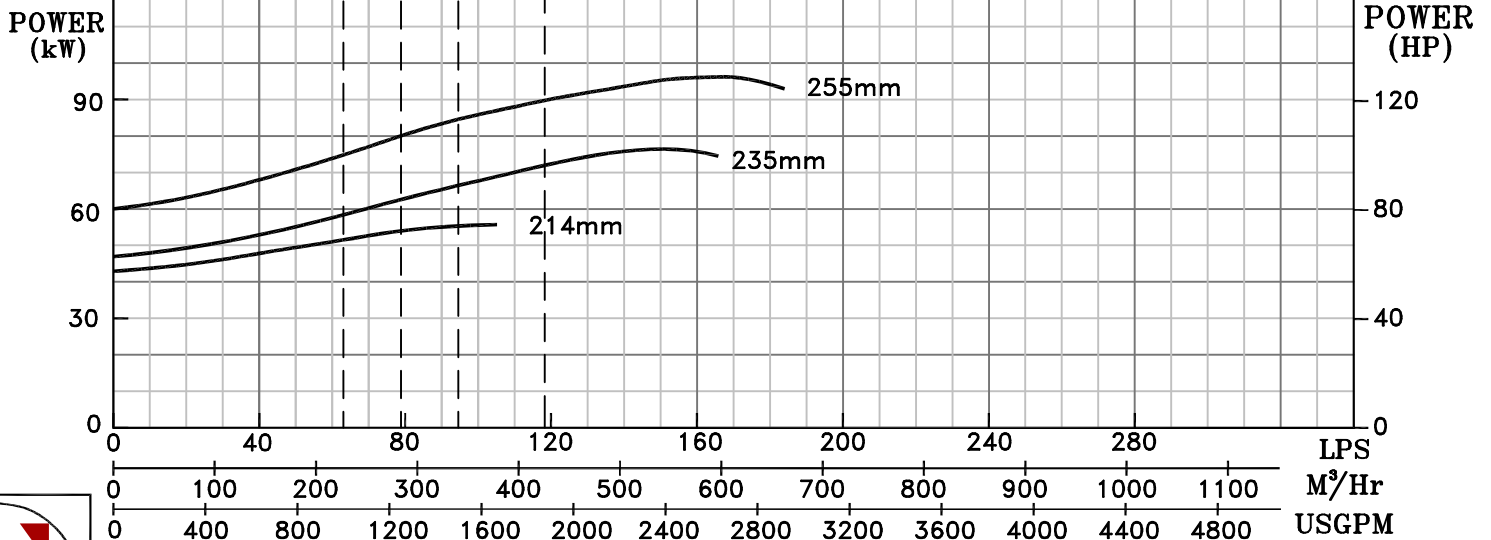

2800 RPM